




PULLEY
AS-05




ANTRON d.o.o.
Trgovska ulica 3
6310 Izola - Isola
Slovenija
T: + 386 5 640 01 50
F: + 386 5 640 01 51
E: info@anthron.si
www.anthron.si

PULLEY AS-05

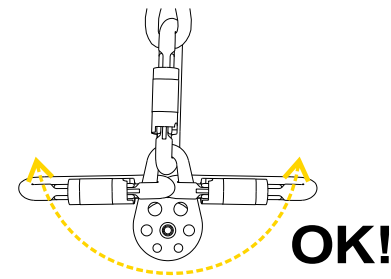

$\varnothing_{max} = 11mm$

OK!


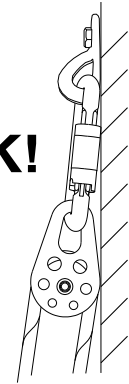


GENERAL INFORMATION

The AS-05 is a smaller size movable side plates pulley with surprisingly large range of possible applications. Its high rope manoeuvring versatility with relatively low weight makes it a perfect backup companion to every rigger or rescuer in the rope access field. Its main advantage over comparable products is the capability to insert two carabiners one above the other in the attachment hole what qualifies it for use in numerous setups and positions (e.g. tight space single and double traverse line travelers, optimization of pulley and progress capture systems or rigging with little equipment on disposal). All this, its high breaking loads and the recent addition of a low friction polymer bushing in the bearing provide a compact package for an attractive price.

TECHNICAL CHARACTERISTICS

- Movable side plates
- High breaking strength
- Low friction and high strength and abrasion resistant bushing in plain bearing
- Attachment hole accepts two carabiners
- High rope maneuvering versatility
- Low weight
- Coefficient of friction = 18 % => efficiency = 82 %

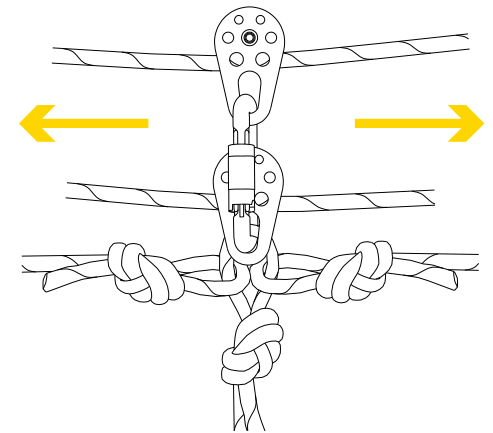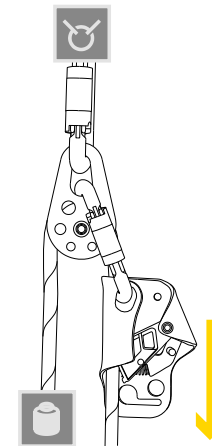

| FEATURE | VALUE |
|-------------------|---------------------------|
| DIMENSIONS [mm] | 85 x 50 x 32 |
| MASS | 112 g |
| ROPE DIAMETER | $\phi \leq 14 \text{ mm}$ |
| MAXIMUM SPEED | 10 m/s |
| S. W. L. | 2 x 3 kN |
| BREAKING STRENGTH | 30 kN |
| NORM | EN 12278 |