


## TM-9 trinožec

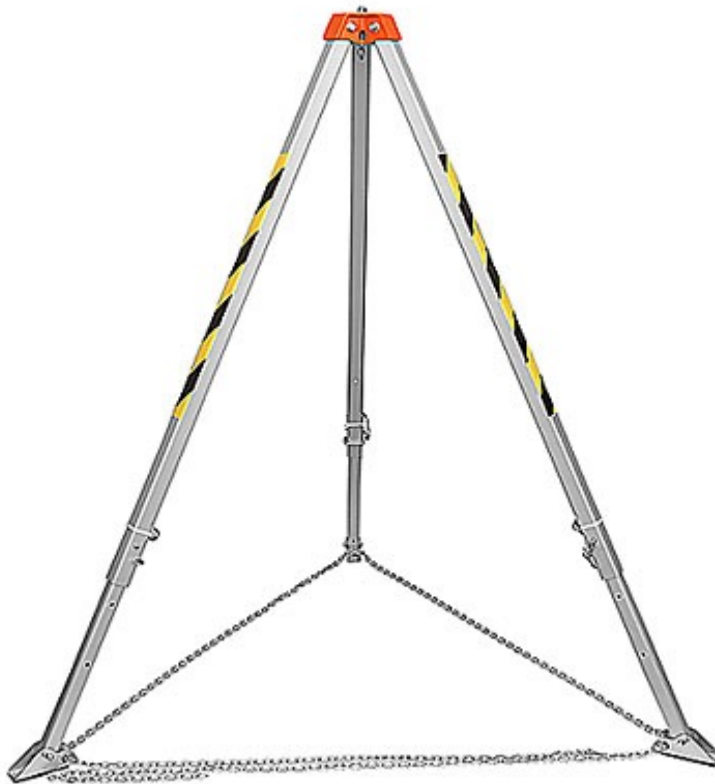

### STANDARD: EN 795:1996 Class B

Safety tripod TM 9 is a component of personal protective equipment against fall from a height. It is used as a portable anchor point. Safety tripod TM 9 has been tested according EN 795 as a transportable temporary anchorage device class B. Tripod TM 9 has to be used in conjunction with fall arrest equipment.

Telescopic legs allow to adjust tripod's height.

Tripod TM 9 can be the protection for one person only.

#### RANGES (Legs fully retracted ... extended)

- |  |              |
|--|--------------|
| ➤ Working Height :                             | 147...229 cm |
| ➤ Legs Spacing :                               | 119...182 cm |
| ➤ Diameter over which it can deploy a tripod : | 140...213 cm |

#### PARAMETERS

- working load limit: 500 kg,
- aluminium alloy legs,
- weight: 16,5 kg,
- shipping dimensions: 175 x 23 x 23 cm,
- Designed to use with RUP-502 Lifting Device,
- Is approved to use in potentially explosive areas (according to PN-EN 05201 and PN-EN 05204).

ANTHRON d.o.o., Trgovska ulica 3, 6310 IZOLA

tel: 05/64-00-150, fax: 05/64-00-151, [info@anthron.si](mailto:info@anthron.si) [www.anthron.si](http://www.anthron.si)